




ENVIRO-PAK FILTER ASSEMBLY

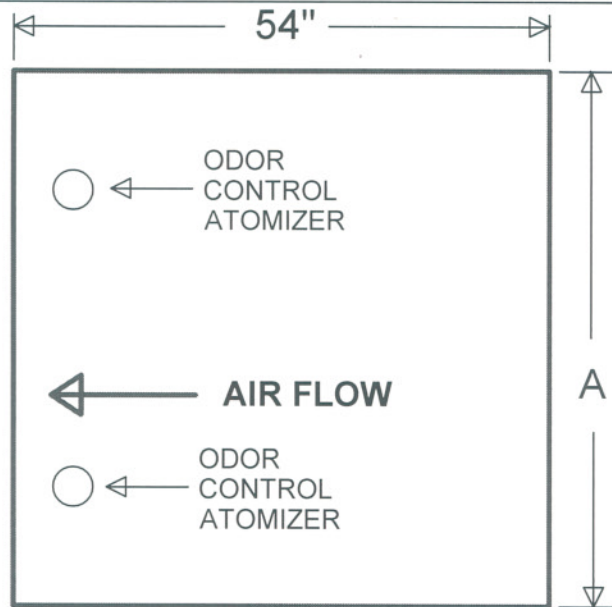

PLAN VIEW

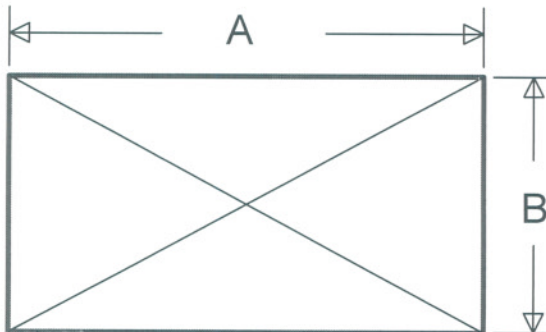

AIR INLET END VIEW

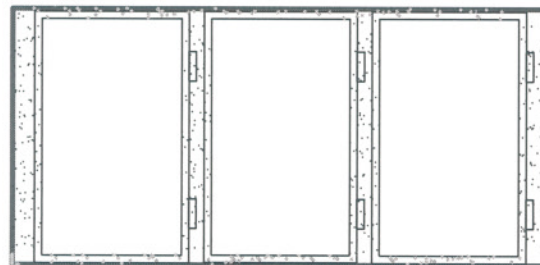

ACCESS SIDE VIEW

SPECIFICATIONS

CONSTRUCTION: ALL WELDED 16 GA. POWDER COATED STEEL.

ONE ROW OF MASTERSEELF BAG PREFILTERS AND TWO ROWS OF 95% EFFICIENT BAG FILTERS.

LEFT OR RIGHT ACCESS SIDE.

OPTIONAL HIGH STATIC PRESSURE WARNING SYSTEM TO ALERT NEED TO CHANGE FILTERS.

OPTIONAL **MOAS** ODOR ABATEMENT SYSTEM

SEE FILTER REPLACEMENT SCHEDULE FOR FILTERS AND ECOSORB 505 REPLENISHMENT SCHEDULE.

99% EFFICIENT REMOVAL OF PARTICULATE MATTER DOWN TO 1 MICRON IN SIZE.

ONE OR MORE 286 DEGREE UL LISTED SPRINKLER HEADS PREPIPED FOR CONNECTION TO BUILDING SPRINKLER SYSTEM.

MODEL NUMBER	CFM	SHIP WT. LBS	PREFILTER 24 x 12	PREFILTER 24 X 24	HE FILTERS 24 X 12	HE FILTERS 24 X 24	A WIDTH	B HEIGHT	C SUPPORT
EPFA-24-24	1800	200		1		2	24	28	24 X 4
EPFA-36-24	2700	250	1	1	2	2	36	28	36 X 4
EPFA-48-24	3600	300		2		4	48	28	48 X 4
EPFA-60-24	4500	350	1	2	2	4	60	28	60 X 4
EPFA-72-24	5400	400		3		6	72	28	72 X 4
EPFA-84-24	6300	450	1	3	2	6	84	28	84 X 4
EPFA-96-24	7200	500		4		8	96	28	96 X 4
EPFA-48-48	7200	600		4		8	48	48	48 X 4
EPFA-60-48	9000	700	2	4	4	8	60	48	60 X 4
EPFA-72-48	10800	800		6		12	72	48	72 X 4
EPFA-84-48	12600	900	2	6	4	12	84	48	84 X 4
EPFA 96-48	14400	1000		8		16	96	48	96 X 4

MOLITRON
COMPANY INC. 

1457 Ammons Street, Suite 211
Lakewood, CO 80214
303-969-8888 800-525-9494